

ORIGINAL



Built With Tomorrow's Technology

ORIGINAL



**The complete line . . . more than
40 styles. All in stock.**

TRTL 30x6, TRTL30, TL30

This unretouched photo was taken at the UL lab as technicians were trying to penetrate an Original TRTL30x6. Each Original safe is UL approved. All safes have a minimum of 1 hour fire protection, rated by YUS standards.



Original's Group I combination lock is Manipulation Proof[®] and X-Ray Proof[®] with more than 1 million possible combinations. The key lock is anti-acid and anti-pick resistant, for maximum security. **(Attacks with fiber optics will also prove to be futile.)**



At least one of Original's super-sized bolts is **phosphorous bronze**. Which one? We don't know and the human eye cannot detect the extra protected bolt.


Boltwork is protected by a minimum of 3 randomly placed relockers.

ORIGINAL
SAFE & VAULT INC.

For full details on the world's most sophisticated line of safes, contact:

3709 Park Avenue, Union City, NJ 07087

201-867-0939 • Outside NJ 800-654-5213 • Telex 497-2406

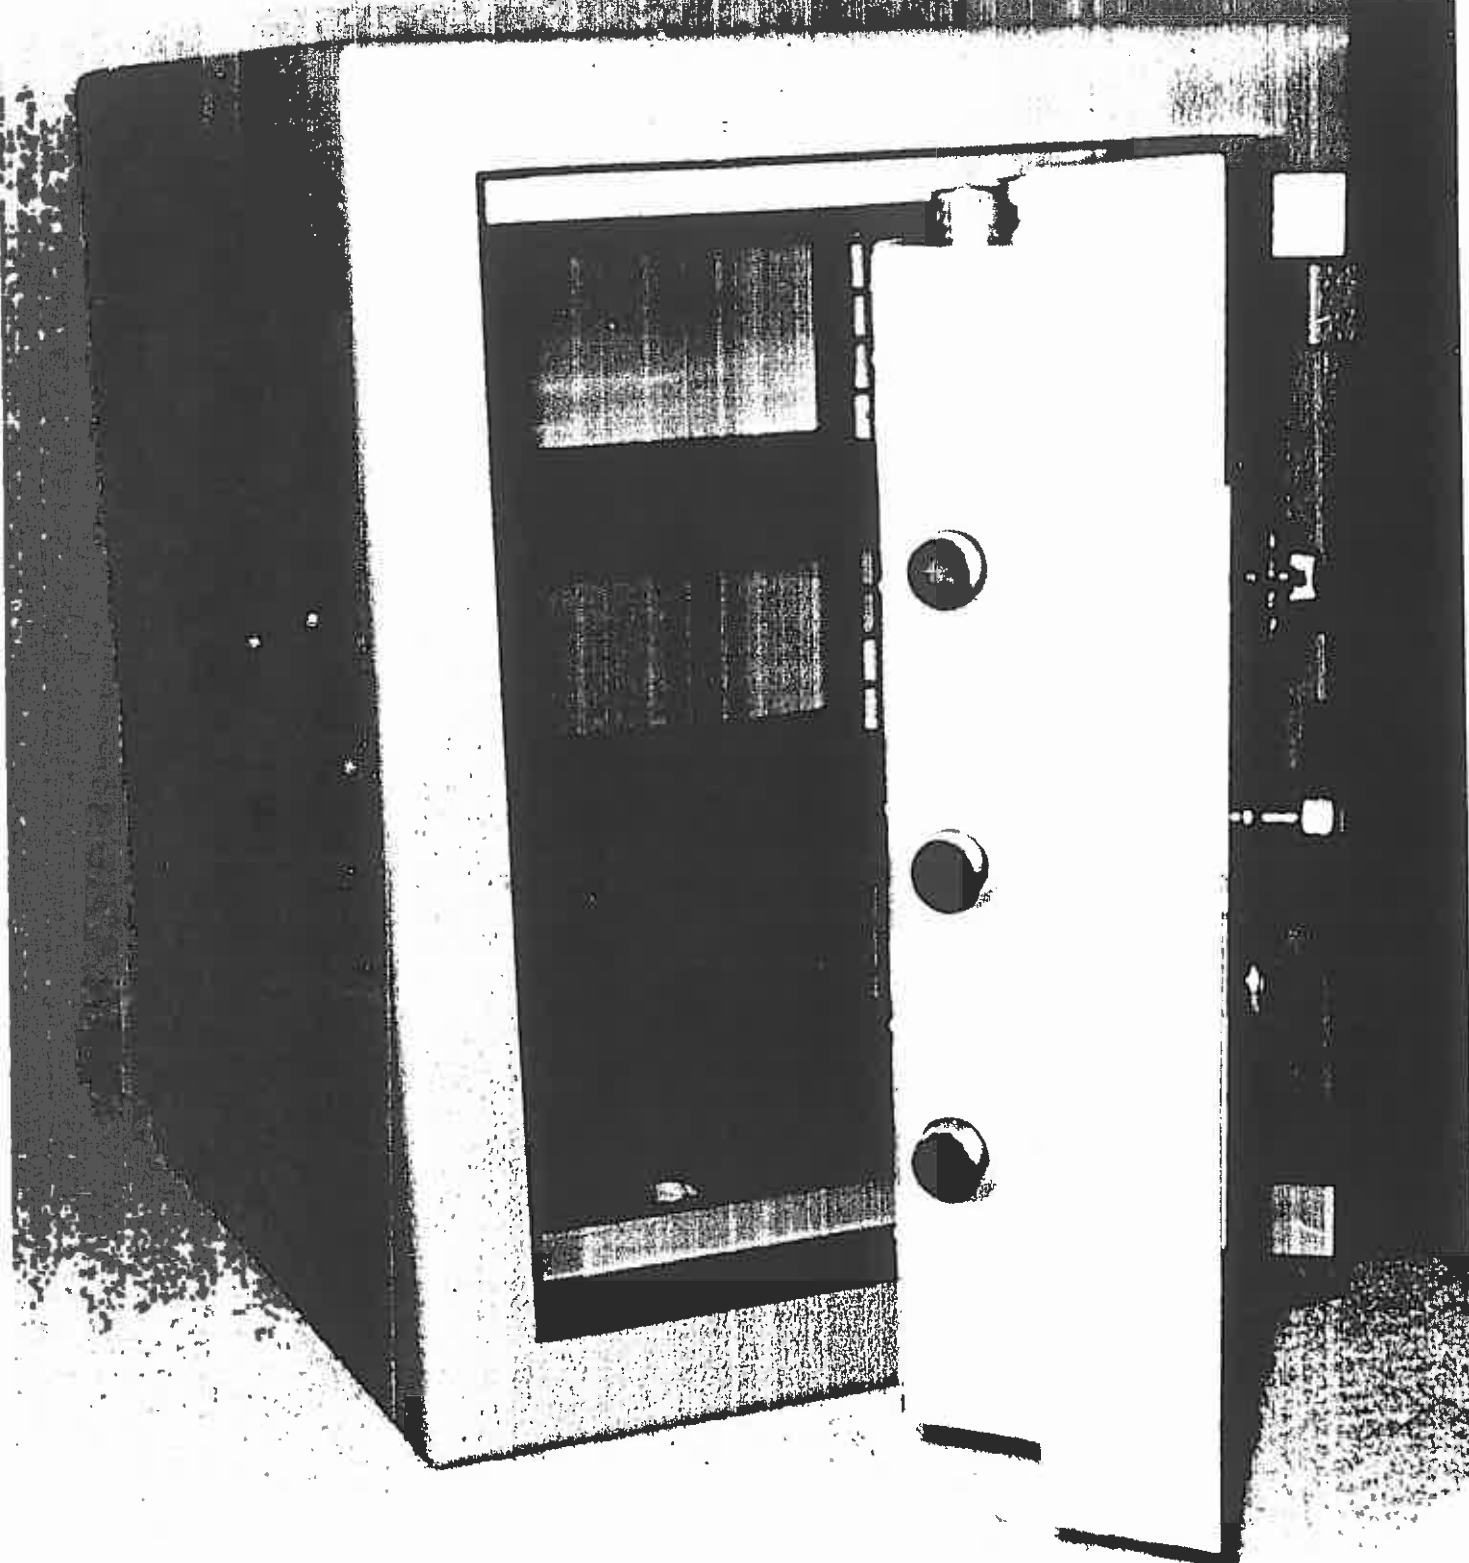

ORIGINAL
SAFE & VAULT INC.

TRTL-30X6

The Original Safe, a culmination of the last 50 years of metallurgical, mechanical and security technology is finally available to the public.
 Designed and engineered by Original Safe USA, the safes are manufactured by MZT Yugoslavia.
 After surviving a battery of demanding tests, the safes were awarded the United States Underwriters Laboratory (UL) label for TL30 and TRTL30X6.

SPECIFICATIONS TRTL-30X6

- DOOR**
 - Overall thickness 7"
 - 3½" aluminum casting which incorporates a 1¼" layer of 9.7 hard quartzite nuggets
 - Copper framing resists torch attack at strategic areas
 - Additional layer of 1½" high strength composite materials
- BODY**
 - 3½" aluminum bell casting incorporates 1¼" 9.7 hard quartzite nuggets
 - Copper framing resists torch attack at strategic areas
 - Additional layer of 1½" high strength composite materials
- BOLTWORK**
 - Multi-directional movable boltwork (top, bottom, front)
 - Fixed rear boltwork
 - 1½" thick bolts with 1½" throw
- LOCKING DEVICES**
 - Dual-control locking system
 - Group 1 manipulation proof UL rated combination lock
 - High security key lock (12 levers)
- RELOCKING DEVICES**
 - Minimum of three randomly located non retractable relockers
 - One live relocker
- RATING**
 - UL TRTL-30X6
 - One hour YUS fire rating

MODEL	INTERNAL (in.)			EXTERNAL (in.)			CUBIC CAPACITY (ft³)	WEIGHT
	H	W	D	H	W	D		
2618	26	18	18	35	27	29½	4.87	1896
3320	33	20	22	42	29	33½	8.40	2645
4520	45	20	22	54	29	33½	11.45	3086
5220	52	20	22	61	29	33½	13.24	3527
6422	64	22	25	73	31	36½	20.37	4497
7036	70	36	26	79	45	37½	37.91	6283



3709 Park Avenue • Union City • NJ • 07087 • 201-867-0939
 Outside NJ 800-654-5213 • Telex 497-2406