

# International GemVault TRTL 30x6

## Six-Sided Protection plus Fire Protection

### Alloy Construction All Six Sides


The massive 8½" thick door and 5" thick body contain a solid layer of aluminum with corundum and copper inclusions behind a massive high density barrier material incorporating carbon fiber and other anti-penetration materials

### Adjustable Shelves

A convenient arrangement of adjustable shelves is provided with each safe. Lockable compartments are optional.

### Massive 4-way Active Boltwork

The four-way moving boltwork engages both vertically and horizontally into the protective casting of the body. The bolts are an impressive 2" in diameter.

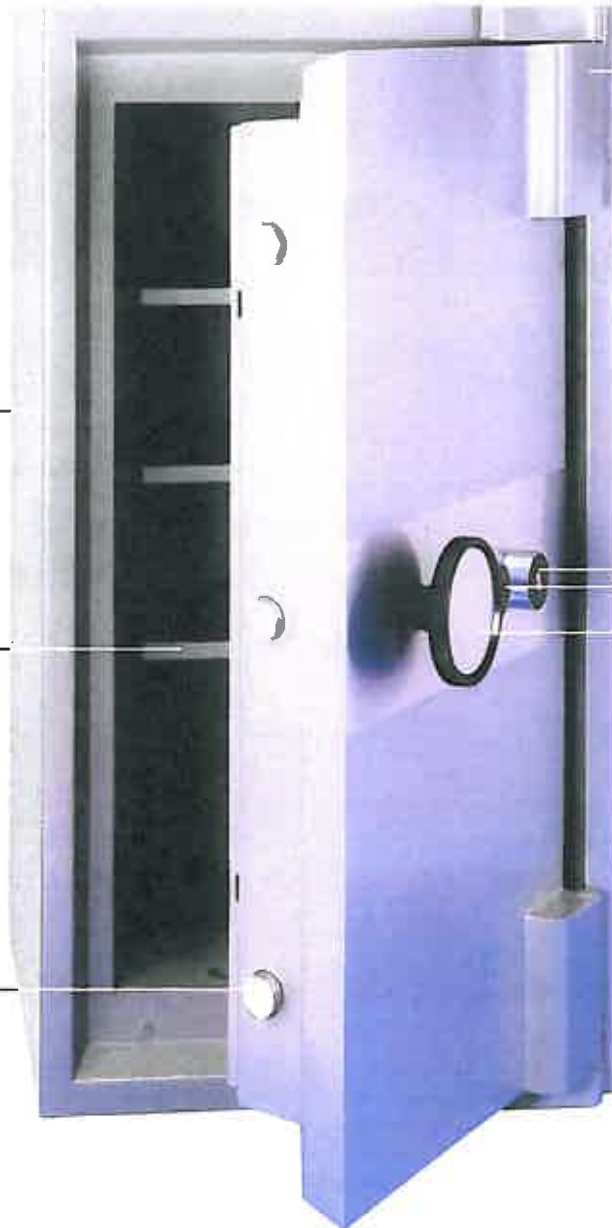

**Adjustable  
Ball Bearing  
Hinges**

### Fiber-Optic Protection Over Keylock

The most vulnerable point of entry for fiberoptics is through the keyhole which is protected by an anti-fiber optic keyhole cover lock.

### U.L. Approved Combination Lock


Locking is by Group 1 UL classified combination lock with key change capability. In addition, the safe has a high-security keylock with keys provided in triplicate.

**Convenient  
Round Turn/  
Pull Handle**

**MODEL GV-4720**

**T**he International GemVault TRTL-30x6 is the outcome of over 75 years of concentrated research and development by one of the world's major safe and vault manufacturers of high-security safes and vaults since 1912. The GemVault TRTL-30x6 incorporates many of the same design features found on safes costing much more. One of the most unique features that has been incorporated in this safe is the anti-fiber optic keyhole cover lock, which prevents burglars from inserting fiber optic devices into the keyhole.



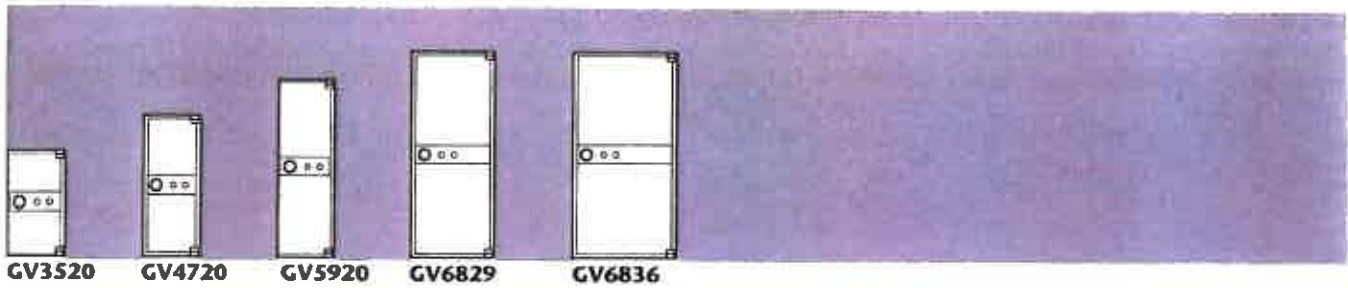


### International GemVault TRTL 30x6

MODEL	Internal Diameter/In.			External Diameter/In.			Capacity	Door	Body	Total	No. of
	H	W	D	H	W	D*	Cu. Ft.	Lbs.	Lbs.	Lbs.	Shelves
GV3520	35	20	20	46	31	34½	8.5	725	2175	2900	2
GV4720	47	20	20	58	31	34½	11.4	975	2925	3900	3
GV5920	59	20	20	70	31	34½	14.3	1050	3150	4200	4
GV6829	68	29	18	79	40	32	20.25	1295	3885	5180	4
GV6836	68	36	26	79	47	38½	35.4	1705	5115	6820	5

\*Add 2½" to depth for handle & hinges  
 We reserve the right to alter any specifications or make any improvements without prior notice.

### Door Swing Dimensions

MODEL	Door Swings		
	A	B	C
GV3520	20	62	55½
GV4720	20	62	55½
GV5920	20	62	55½
GV6829	29	69	74
GV6836	36	84½	88½

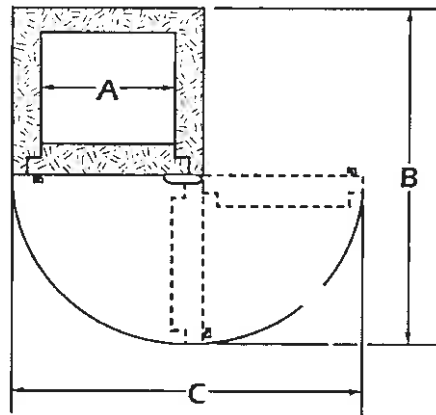

### Distributed By:

# LACKA SAFE

(201) 896•9200 (800) 654•5213

www.LackaSafe.com

The International GemVault has been Laboratory tested to meet or exceed the following labels:

