

# International JewelVault TL-30

## Six-Sided Protection plus Fire Protection

### Composite Body Construction All Six Sides

The massive 5" thick door and 3 3/4" thick body structure contain some of the most advanced high security protection materials ever developed.

### Adjustable Shelves

A convenient arrangement of adjustable shelves is provided with each safe. Lockable compartments are optional.

### Massive 3-way Active Boltwork

The three-way moving boltwork engages both vertically and horizontally into the protective casting of the body. The bolts are an impressive 1 1/8" in diameter.



Adjustable  
Ball Bearing  
Hinges

### Fiber-Optic Protection Over Keylock

The most vulnerable point of entry for fiberoptics is through the keyhole which is protected by an anti-fiberoptic keyhole cover lock.

### U.L. Approved Combination Lock


Locking is by Group 2 UL classified combination lock with key change capability. In addition, the safe has a high-security keylock with keys provided in triplicate.

Convenient  
Round  
Turn/Pull  
Handle

MODEL JV-4520

The International JewelVault TL-30 is the outcome of over 75 years of concentrated research and development by one of the world's major safe and vault manufacturers of high-security safes and vaults since 1912. The JewelVault TL-30 incorporates many of the same design features found on safes costing much more. One of the most unique features that has been incorporated in this safe is the anti-fiber optic keyhole cover lock, which prevents burglars from inserting fiber optic devices into the keyhole.



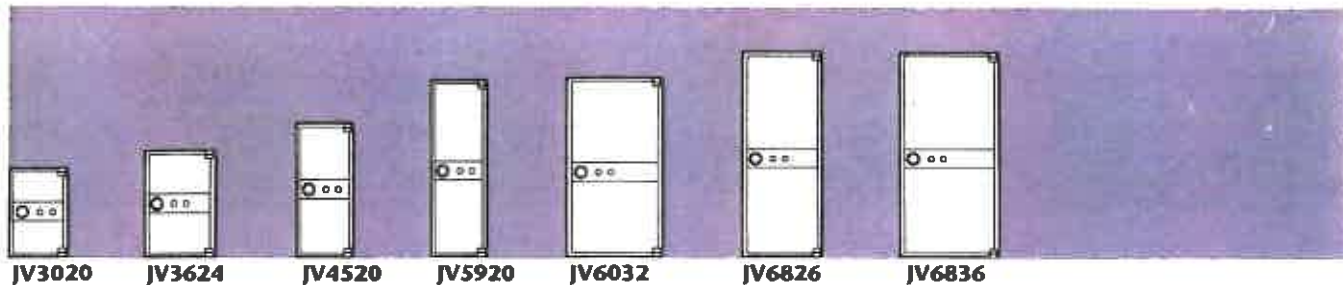


## International JewelVault TL-30

MODEL	Internal Diameter/In.			External Diameter/In.			Capacity Cu. Ft.	Door Lbs.	Body Lbs.	Total Lbs.	No. of Shelves
	H	W	D	H	W	D*					
JV3020	30	20	20½	36½	26½	29	7.1	326	1154	1480	2
JV3624	36	24	20½	42½	30½	29	10.3	448	1452	1900	3
JV4520	45	20	20½	51½	26½	29	10.7	466	1474	1940	3
JV5920	59	20	20½	65½	26½	29	14	602	1798	2400	4
JV6032	60	32	20½	66½	38½	29	22.7	840	2520	3360	5
JV6826	68	26	20½	74½	32½	29	21	791	2139	2930	5
JV6836	68	36	26	74½	42½	34	36.8	1100	2830	3930	5

\*Add 2½" to depth for handle & hinges  
 We reserve the right to alter any specifications or make any improvements without prior notice.

## Door Swing Dimensions

MODEL	Door Swings		
	A	B	C
JV3020	20	52½	48
JV3624	24	55¾	56
JV4520	20	52½	48
JV5920	20	52½	48
JV6826	26	59	61
JV6032	32	65	73
JV6836	36	74	80¼

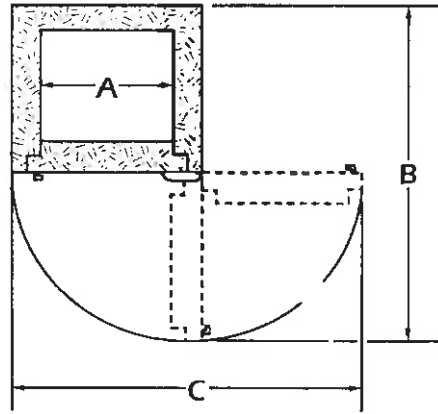

## Distributed By:

**LACKA SAFE**  
 (201) 896•9200 (800) 654•5213  
[www.LackaSafe.com](http://www.LackaSafe.com)

The International JewelVault has been Laboratory tested to meet or exceed the following labels:

