


Summit TRTL30x6 by Bischoff



Size 6021

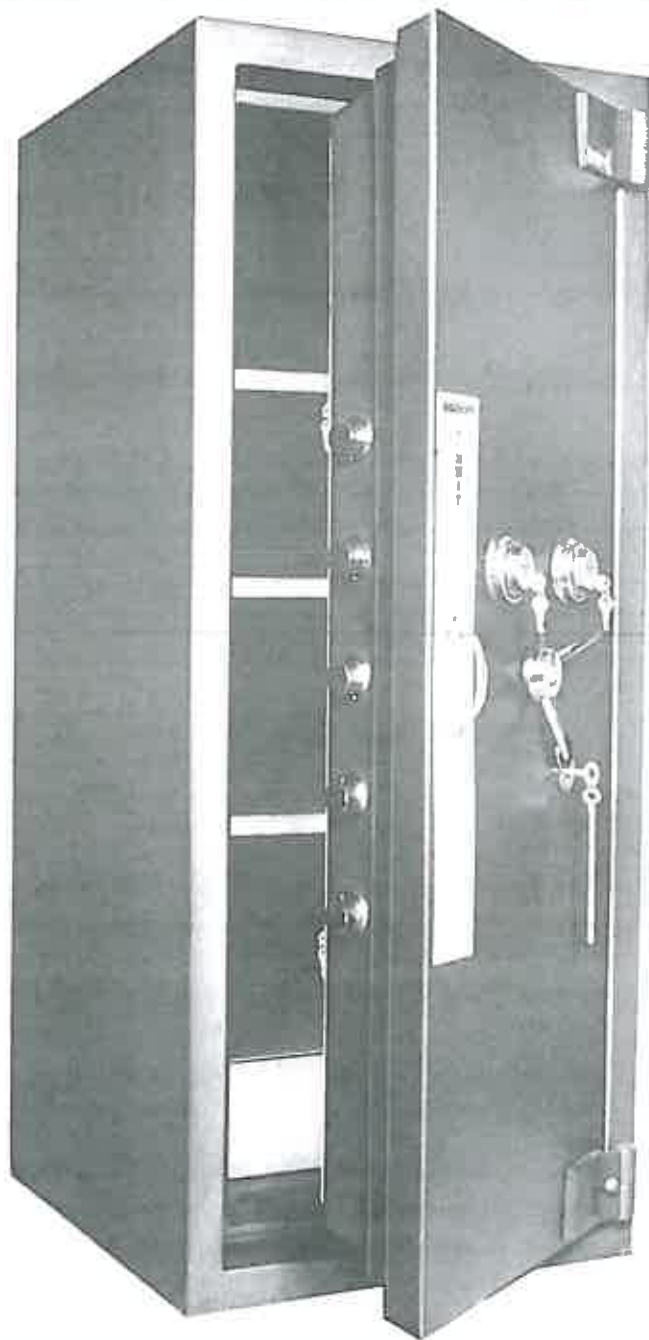

Bischoff

Bischoff Security U.S.A.

*Where Diamonds And Security All Began . . .
Insurance Approved For Upgrading Your Security*



The safe manufactured where diamonds and security all began . . .

Bischoff TRTL30x6

Introducing the Summit TRTL30x6

Manufactured for the high-security market, the Summit is the first safe to use special Super-Alloy from Bischoff. This Super-Alloy incorporates multiple layers of stainless steel, aluminum alloy, copper, and Bischoff's own special alloy spheres.

The Summit safe, using Bischoff's special Super-Alloy, gives six-sided protection for locations with severe elevator and floor-load restrictions. Bischoff is truly the problem-solver.

DOOR SPECIFICATIONS

The overall door thickness is 220 mm (8.5"), and is constructed of outer and inner plates that contain alloy thickness of 100 mm. Additional protection is provided by a frame of copper bars in the door and jamb area.

BODY SPECIFICATIONS

The body features a one-piece bell casting of Super-Alloy by Bischoff with an overall thickness of 110 mm with an alloy thickness of 100 mm.

LOCKS

The Summit is equipped with two U.L.-listed group 1 manipulation-proof locks. A third lock, a nine-lever, double-bitted keylock is provided in conjunction with the combination locks. All models are prepared for time locks, with the exception of the smallest two units.

BOLTWORK

The massive boltwork and locking systems were designed to give maximum protection against explosive attacks from all directions. The Summit has a three-way moving boltwork, with fixed bolts on the hinge side of the door. The diameter of each bolt is a massive 39mm (1½").


RELOCKING DEVICES

The relocking devices and vital mechanisms are protected by special glass plates, which if tampered with, release a number of randomly-located relocking devices, independent of the exterior locks. This provides the safe with maximum protection against invasion. Live relocking devices are used so that they activate each time the safe is locked.

Bischoff



The Bischoff Safe & Electro Security Group

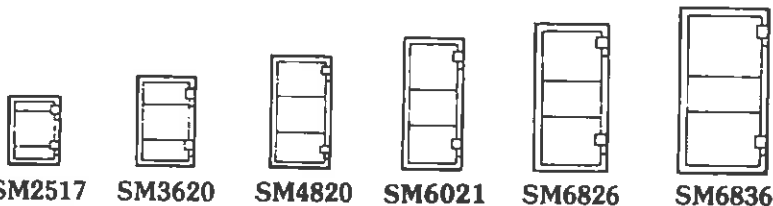

SM2517

SM3620

SM4820

SM6021

SM6826

SM6836

LACKASAFE

Jaime Torrejon
Director, Sales & Marketing

Office: 800-654-5213
Cell: 201-618-9424
Email: jaime@lackasafe.com
Web: www.lackasafe.com
Fax: 201-896-9204



(See back of card)

MODEL	INSIDE DIMENSIONS Inches			OUTSIDE DIMENSIONS Inches			CUBIC INCH CAPACITY	APPROX. TOTAL WEIGHT
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH		
SM2517	25	17	16	33 1/4	25 1/4	28 1/4	6800	1518 lbs.
SM3620	36	20	20	44 1/4	28 1/4	32 1/4	14,400	2215 lbs.
SM4820	48	20	20	56 1/4	28 1/4	32 1/4	19,200	2850 lbs.
SM6020	60	21	21	68 1/4	28 1/4	32 1/4	26,400	3400 lbs.
SM6826	68	26	20	76 1/4	34 1/4	32 1/4	35,360	4200 lbs.
SM6836	68	36	26	76 1/4	44 1/4	38 1/4	83,648	5500 lbs.

OVERALL DOOR THICKNESS TRTL30x6 — 8 5/8 Inches

ALLOY THICKNESS TRTL30x6: DOOR — 3 15/16 BODY — 3 15/16

All Dimensions and Weights are Approximate

Showroom

400 Meadow Lane
Carlstadt, NJ 07072