


# KNIGHT ECONOMY SERIES

## "B" AND "C" RATE BURGLARY

Knight Safe's Economy Series is designed for businesses and individuals requiring burglary protection at an economical cost. The "B" Rate safes are designed for daytime protection of cash and valuables in controlled or semi-controlled locations. The "C" Rate safes are constructed in the exact same manner as our TL15 Underwriters safes and are the ultimate safes for small business and home protection of valuables. See reverse side for Burglary Class "C" sizes and characteristics.

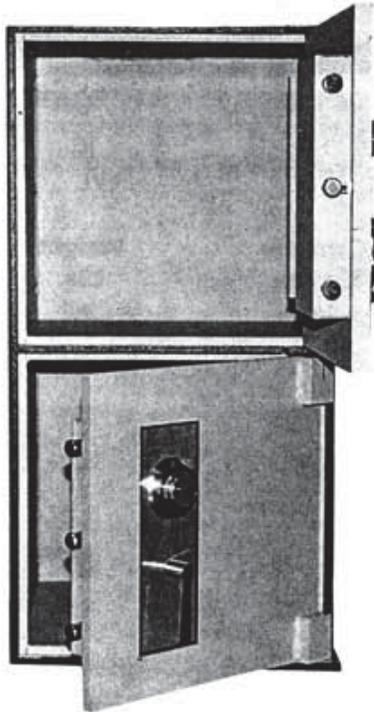

"C" Double Door Special



"B" 3024-20

### CUSTOM SIZES UPON REQUEST

#### Burglary Class "B"

- ¼ inch body and ½ inch doors of carbon steel with 50,000 lbs. tensile strength. All joints electrically welded.
- Group II Underwriters approved lock and relocking device.
- 1" diameter chrome bolts with hard plate protecting each bolt.
- Continuous locking bar on hinge side.
- Drill resistant hard plate protecting locking mechanism.
- All doors removeable and adjustable when open.
- Hard plate protecting lock is Xray proof, radiographic proof, drill resistant and punch resistant.
- Bottom of all safes treated with Zinc Chromate to prevent rust.
- All safes painted with Polane® Polyurethane Enamel to give them superior appearance and durability.
- Wide range of optional interiors, timelocks, time delays, and claddings available.
- All safes carry full one year warranty.

#### STANDARD SIZES

Model	Inside Dim.			Outside Dim.			Weight Lbs.
	H	W	D	H	W	D*	
1214	12	14	14	12.5	12.5	17	150
2020	20	20	20	20.5	20.5	23	265
2424	24	24	20	24.5	24.5	23	350
3024	30	24	20	30.5	24.5	23	410

Add 2" to depth for handle

## BUY AMERICAN

### Burglary Class "C"

- ½ inch body and 1 inch doors of carbon steel with 50,000 lbs. tensil strength. All joints electrically welded.
- Group II Underwriters approved lock and relocking device.
- 1" diameter TL-15 type chrome locking bolt(s) -- all safes 12 inches high or over have three bolts.
- Hard plate behind each bolt.
- Spyproof key locking dial for dual custody.
- Continuous locking bar on hinge side.
- Bolt detent to eliminate damage to bolts.

- Drill resistant hard plate protecting locking mechanism.
- All doors removeable and adjustable when open.
- Hard plate protecting lock is Xray proof, radiographic proof, drill resistant and punch resistant.
- Bottom of all safes treated with Zinc Chromate to prevent rust.
- All safes painted with Polane® Polyurethane Enamel to give them superior appearance and durability.
- Wide range of optional interiors, timelocks, time delays, and claddings available.
- All safes carry full one year warranty.

### STANDARD SIZES

Model	Inside			Outside			Capacity Cu. In.	Weight Lbs.
	H	W	D	H	W	D		
1214	12	14	16	13	15	20	2,688	252
1616	16	16	16	17	17	20	4,096	320
1814	18	14	16	19	15	20	4,032	320
2020	20	20	20	21	21	24	8,000	477
2416	24	16	16	25	17	20	6,144	421
2424	24	24	20	25	25	24	11,520	577
3024	30	24	20	31	25	24	14,400	707
3636	36	36	20	37	37	24	25,920	1,020
4024	40	24	20	41	25	24	19,200	871
5024	50	24	20	51	25	24	24,000	1,035

Add 2" to depth for handle

