


# **GC68 BANKERS QUALITY SAFES**

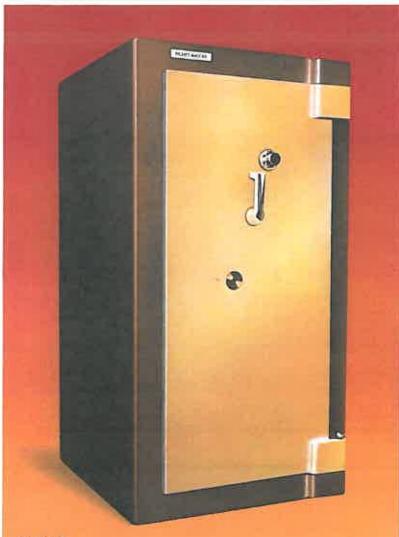

## WALLS

All the walls of these safes have a total thickness of 153 mm (6") and are formed of a complex material called "Complexe GC", which adds Volcanite-two to the traditional and well-proven protection of Fichet-Bauche safes in an overlapping structure which increases the difficulties confronting the burglar.

#### DOOR


The door has a total thickness of 216 mm (8 1/2"), giving an actual protective thickness of 153 mm (6"), which is further reinforced in comparison with the walls, particularly in front of the locking and combination mechanisms

It is mounted on external pivots, which enable it to be opened through 180°.

### LOCKING

The principal locking mechanism is an "NS" pump lock. This high security lock is operated by a short key. It is linked to our "Monocommande" combination lock, which offers a total of 63 million real and different possible combinations, thus ensuring that the secret of the lock is kept. These two mechanisms are protected by the whole of the door's defences.

The three largest models can also be fitted with a time lock with three chronometers, which allows the safe door to be immobilised for a period determined by the user.







	DII	MENSIONS	* add 1" (	25 mm) for	depth over	handle.		
WODEL	EXTERNAL DIMENSIONS			INTER	WAL DIMENS	VOLUME	WEIGHT	
	HEIGHT	WIDTH	DEPTH	HEIGHT	Withter	perme	VOLUME	VIII.
GE 100 / 27"	1 004 mm 39 1/2	680 mm 26 374"	850 mm 32 9/8°*	694 mm 27 1741	374 mm 14-3/41	410 mm 16 104"	110 W 3.9 co-#	1 200 kg 23.7 cw
GC 200 / 43°	1 404 mm 55 144	750 mm 29 1/2	850 mm 32 3 M **	1 094 mm 43"	444 mm 17 1/2"	410 mm 16 1/4"	206 m 7.3 curt	1 650 kg 325 cw
GC 360 / 61"	1 684 mm 63 1/8	950 mm 37 3/8"	850 mm 32 0/8**	1 294 mm 51"	6-44 mm 25 1 M	410 mm	955 m 12.5 cum	2 250 kg 44.2 cw
GC 600 / 65°	1 054 mm 76 7/6	1 160 mm 45 5/8	850 mm 32 3/875	1 654 mm 65 1/8"	854 mm 33 5/8"	410 mm 16 1/4"	505 ftr 21 50 ft	2-950 Ag 58 cw

		DIM	ENSIONS	OF INTE	RNAL CUR	BOARDS	•		
MODEL	EXTERNAL DIMENSIONS			CLEAR INTERNAL DIMENSIONS				NUMBER	Lamenta
	некня	WADSTEE	CERTH	HEIGHT	winter	DEPTH/ BOOR	LOCK	LEAVES	WEIGHT
SC 100/27	224 mm 6 S/4	366 mm 14 1/2"	395 mm 35 1/2"	184 mm 7 1/4	322 mm 12 273	976 min 14 3/6	340 Hills 19 1/3**	1	11 kg 0.22 cwt
GC 200 / 45"	224 mm 0.5/4	488 mm 13 1/4	395 mm 15 172	184 mm 7 1/4"	392 mm 15 1/27	976 mm 14 3/4	340 mm 15 173	,	12 kg 0:23 cwt
GC 350 /51	224 mm 8 314	636 mm 25"	395 mm 15 1/2	184 mm 2 1/4"	590 mm 20 1/3	78 mm 14 9/4	340 mm 30.3/3	- 11	16 kg 0.38 cwt
GC 600 / 65"	124 nm 6 314	845 mm 50 133	395 mm 15 1/2"	164 mm 7:174"	794 mm 31 1/4	376 mm 14 3/4"	340 mm 13 173"	2	22 kg 0.43 cwt

\* The 4 models of the range can be litted with an internal cupbor



# FICHET-BAUCHE

(201) 896 • 9200

(800) 654 • 5213

www.LackaSafe.com

products, we therefore reserve the right on attenthe appeciation without prior notice.

du